

SDI E100 Fabric Door

Low Cost

Rugged yet economical solution for environmental separations where high speed is not a requirement. Pre-wired operator with integral control panel requires a minimum of electrical wiring.

Door Curtain Material

Weather and puncture resistant fabric with a layer of woven polyester monofilament PVC, available in a wide spectrum of colours.

Virtually Indestructible

Takes a hit, the break away bottom bar gives away allowing for fast and easy repair without the use of special tools.

Minimal Maintenance

Designed with fewer moving parts, the E100 provide worry free access through your opening, using only the best quality components available.

Zero Downtime

Even after an impact this door is designed to have you up and operating in minutes, allowing your facility to keep running without interruption.

Energy Conservation

Superb Resiliency and flexibility and temperatures ranging from -15C to 90C. The airtight seal and minimal infiltration is ideal where heat loss is a concern.



Features


- Maximum Size: 12'W or 12'H / 144' sq.ft
- Header Clearance: 18" above clear opening
- Fabric: PVC Coated Polyester Monofilament
- Side Guides: Structural angle guides
- Input Voltage: 1 or 3Phase
- Motor HP: As Required

Available Options


- Weatherseal/Hood
- Operator Covers
- Induction Floor Loops
- Motion/Presence Detectors
- Pull Cords
- Radio Control Systems
- Warning Horn/Beacon
- Additional Safety Photocells

Candoor Overhead Doors Ltd. - Authorized Distributor

Typical Details

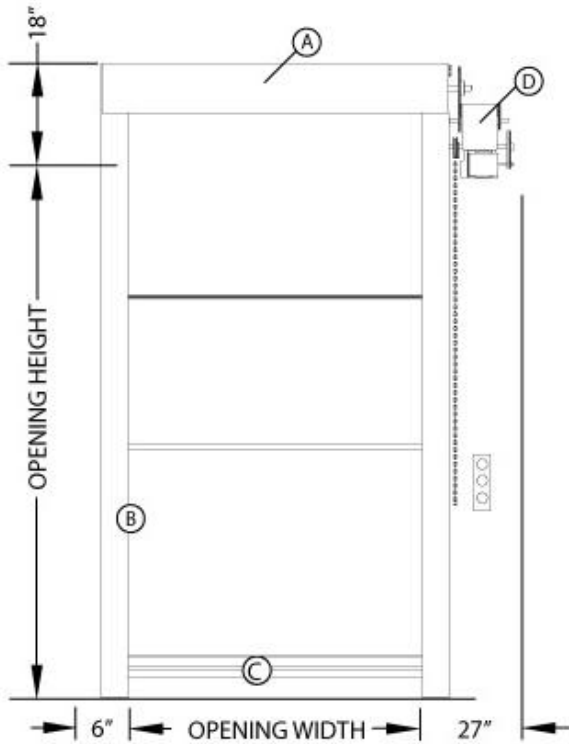

- A Barrel & Curtain assembly
- B Side guides
- C Bottom Bar
- D Operator

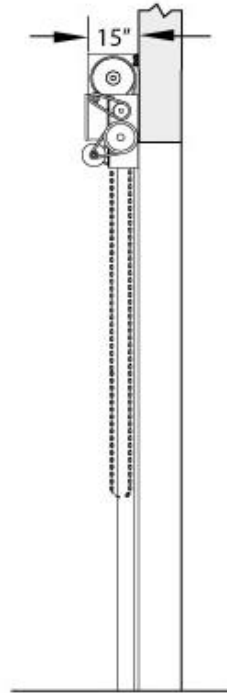

- NOTES: 1) DRAWING NOT TO SCALE
2) RIGHT HAND DRIVE SHOWN
LEFT HAND DRIVE OPPOSITE

Candoor Overhead Doors Ltd. - Authorized Distributor